

REAR SPRING FORWARD HANGER


#@\$!@#\$% INSTRUCTIONS
MID FIFTY F-100 PARTS 1-800-252-1956

PART NUMBER

2810
TAAA 5785

REAR SPRING FORWARD HANGERS

Hangers produced in recent years have some flaws. Unfortunately they are the only ones available and no correct remakes seem to be on the horizon. Here are some steps to make these work.

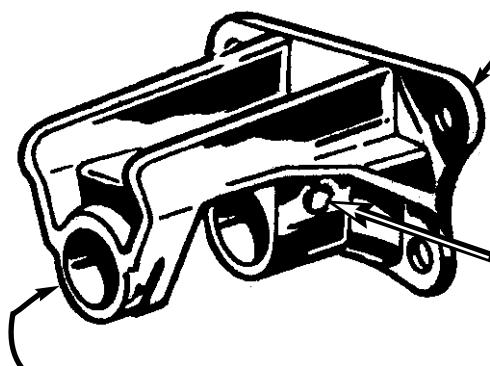

Spring pin may set deep
May need long zerk.

Frame holes may not line up. Original hanger was riveted to frame. You may need to redrill frame to line this one up. Most of you will be redrilling frame anyway in order to flip hanger upside down when using reversed eye springs and/or to set hanger as high as possible. Higher the hanger, lower the truck. Bolts for mounting #84438

Locking pin hole is wrong:

Should have been tapered for pin, may be too large or too small.
To fix: Ream out to fit locking pin, make sure pin does NOT go all the way through. Or use 2" long x 7/16" grade 8 bolts in place of the locking pin. Our #82811

REAR SPRING FORWARD HANGER


#@\$!@#\$% INSTRUCTIONS
MID FIFTY F-100 PARTS 1-800-252-1956

PART NUMBER

2810
TAAA 5785

REAR SPRING FORWARD HANGERS

Hangers produced in recent years have some flaws. Unfortunately they are the only ones available and no correct remakes seem to be on the horizon. Here are some steps to make these work.

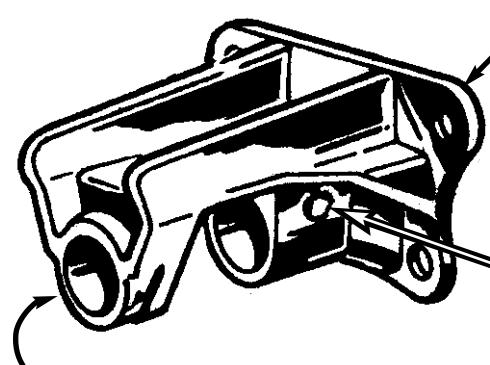

Spring pin may set deep
May need long zerk.

Frame holes may not line up. Original hanger was riveted to frame. You may need to redrill frame to line this one up. Most of you will be redrilling frame anyway in order to flip hanger upside down when using reversed eye springs and/or to set hanger as high as possible. Higher the hanger, lower the truck. Bolts for mounting #84438

Locking pin hole is wrong:

Should have been tapered for pin, may be too large or too small.
To fix: Ream out to fit locking pin, make sure pin does NOT go all the way through. Or use 2" long x 7/16" grade 8 bolts in place of the locking pin. Our #82811