

**"STOP-ALERT"™**


**#AM-01**

**BRAKE LIGHT PULSATOR**

Pulsates lights at 300 pulses per minute for increased visibility and safety. Rated 60 watts (5 amps) at 12 vdc, will power 3rd brake lights or 2 - #1157 bulbs. (For halogen taillights, use one for each taillight.) Solid state circuitry, 2 terminal connection (terminals included).

Thank you for buying a StreetWorks product. Be confident that it will provide the quality and performance that you demand for your car. *Please read and understand all installation instructions before beginning.* Planning and preparation will make the actual installation process easy and quick.

Locate the wire that feeds the light(s) to be pulsated. At a convenient location between the light(s) and the switch that feeds them, cut that feed wire and strip the ends approximately 3/8". Install one of the terminals (provided) onto each of the stripped ends. Attach the terminal installed on the power feed wire from the switch onto "Stop-Alert"™ terminal #1. Attach the terminal installed on the wire going to the light(s) onto "Stop-Alert"™ terminal #2. **DO NOT REVERSE THIS POLARITY. IT WILL DAMAGE THE STOP-ALERT AND MAKE THE BRAKE LIGHTS INOPERABLE!** Test your installation. The screw on the Stop-Alert can be used for securing the unit in place.

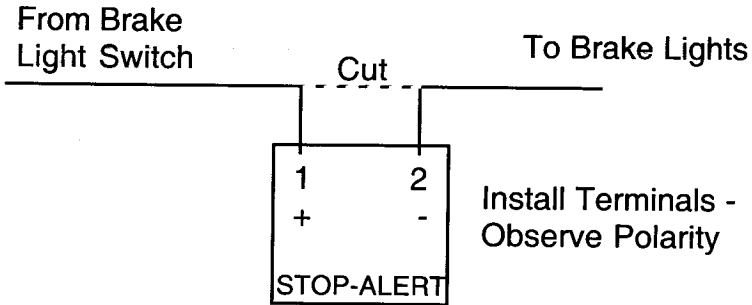

**Watson's**

"Stop Alert" is a Trade Mark of Amperite Co., Inc.

**StreetWorks**

**860.859.0513**

PO Box 270, Bozrah, CT 06334

**DRIVE IT !**

