

BED WOOD

#@\$!*@#\$\$% INSTRUCTIONS
MID FIFTY F-100 PARTS 1-800-252-1956

INST-0215


PART NUMBERS

All wood


PAGE NUMBER

1 OF 1

rev-031511

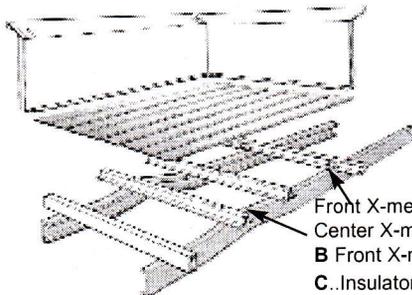

bed wood, strips and crossmembers, see page 109




Front X-member to wood spacer
Center X-members
B Front X-member sleeve
C..Insulators #0214
D..Frame bracket. #0234
E..Hidden mounting bolt, 80230
see pg. for the above pieces

HIDDEN MOUNTING EXPLANATION:

Shown at left is the stock mounting bolt at the front of bed. Note the bed strip has an extra mounting hole for mounting bolt. This hole is eliminated when using "hidden mounting" Bed is secured to frame from underneath with bolt (E) coming up through bracket (D) (#0234.see pg 109) into the Hidden mounting crossmember (0230-HD) which has a tap instead of the sleeve (B). The center x-members (0232-HD) also have threads welded inside, bolt goes through the frame from underneath into threads.

Wood sets on top of front bed panel flange, under side flanges.

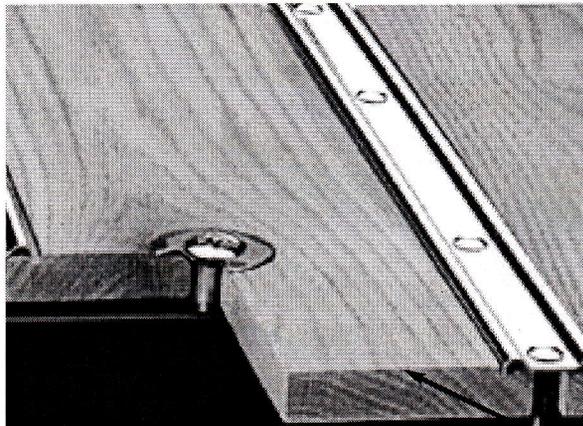

BED WOOD KIT, CLEAR RED OAK, with correct routed edges.

Tail end of bed wood NOT routed, nicer installation, we like to set end cap above wood and bed side flange. see also End Cap.

With hold down bolt holes countersunk for stock mounting or

Without hold down bolt holes, for hidden underbed mounting.

RED OAK WITH MOUNTING HOLES . . .0215-WH

RED OAK NO MOUNTING HOLES . . .0215-NH


also available in White Oak, call, usually about 65.00 more.

EXOTICS, Walnut, Cherry, etc.BIG.\$\$

Additional shipping for woodADD

Do it yourself dimensionsjust askFree

Wood goes over flange of front panel, under flange of bed sides.

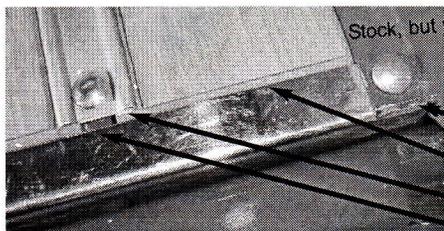

Stock, but yuck

Note we do NOT indent ends of bedwood. We like the look better Install end cap over bed flange instead of under, Now it is more level with strips and


Grind down bed flange a tiny bit if you need to push the cap back to clear gate. If left on top, it chips, see pict.

Eliminates that dust catching crack .

Now it is more level with strips.

Gets rid of gap, and hole, just imagine how much dust will come flying up through this!

If you just must have original, ask for End Rout\$20.00 add.



HEAT PROTECTOR, Guards your wood from harmful exhaust heat. attaches under floor above exhaust,comes with hardware

FIT BEDWOOD BEFORE APPLYING FINISH

As with ANY body part, Bed wood must be pre-assembled for proper fit before adding finish. We suggest assembling for fit and predrilling any holes before applying finish as this protects the wood.

No allowances for bedwood can be made after finish is applied.

Mid Fifty F-100 Parts

(800) 252-1956



INST-0215

INST. BED WOOD DIMS AND INST.